


Plan

14945000000 Shower curtain PLAN

PRODUCT



DRAWING

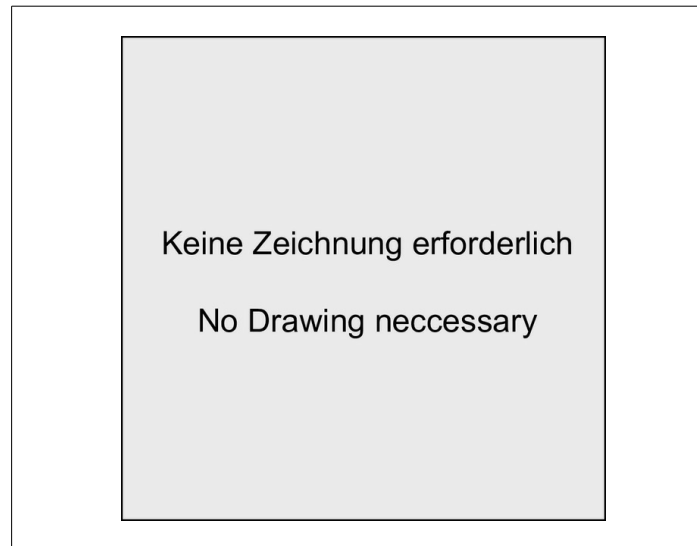

PRODUCT ATTRIBUTES

all sizes are custom made
the following information is required:
Quality levels:
Shower curtain PLAN uni
100% trevira, 80g/m²
Colour: white, light beige or light grey
or
Shower curtain PLAN Flame CS
high-grade flame resistance according to DIN 4102/B1
100% trevira, 76 g/m², colour: off-white
The following applies to all quality types:
vertical seams, reinforced stainless steel eyelets
distance between eyelets ca. 20 cm
roll hem stainless-steel weighted, 50 g per meter
shower-proof, fungicide, antibacterial,
antistatic, calendered, washable at 30°,
shrinkage rate 1-2%, complete with white curtain rings
tested acc. to OEKO-Tex Standard 100

SPECIFICATIONS

KEUCO PLAN shower curtain 14945000000 (on request),
all measurements custom-made,
the following details are required:
quality types:

Shower curtain PLAN uni, 100% trevira, 80 g/m²,
colours: white, light beige or light grey

or

Shower curtain PLAN Flame CS
highgrade flameresistance DIN 4102/B1
100% trevira, 76 g/m²,
colour: off-white

Both quality types are:
reinforced for stainless steel eyelets,
distance between eyelets approx. 200 mm,
weighted seam 50 g per metre
impregnated, fungizid, antibacterial, anitstatic,
washable at 30°, shrinckage appr. 1-2%,
tested acc. to OEKO-Tex Standard 100
complete with curtain rings, white

Measurements: Please specify the length and width over all,

Information concerning the measurements:
All dimensions refer to the actual finish size,
In order for the shower curtain not to touch the bottom of the bath
tub or the floor we recommend the following:
Distance between the floor and the bottom edge of the curtain appr. 30 mm,
Dinstance between the centre of the curtain pole and the top edge of the
curtain
appr. 40 mm,
Please allow appr. 1,3 to 1,5 times curtain pole length when
calculating the required width of the curtain,